

ANTENNAS | MIMO-3-14 SERIES

5-IN-1 TRANSPORTATION & AUTOMOTIVE ANTENNA

410 – 3800 MHz; 4x4 LTE (MIMO), 6.2 dBi; GPS/GLONASS, 21 dBi



410 - 470 MHz
617 - 960 MHz
1427 - 1517 MHz
1710 - 2700 MHz
3400 - 3800 MHz

3.5 GHz
CBRS

CBRS Band

LTE: 6.2 dBi
GPS: 21 dBi

Omni-
Directional

450 MHz

4G LTE

5G

410 - 470 MHz

4G LTE

5G

4x4 MIMO

M2M

Machine to
Machine

Chemical
Protection

IP 69K

GPS Included

Urban

Rural/Farm

Marine

Vehicle

APPLICATION AREAS

- 5-in-1 High performance multi frequency 2G/3G/4G/LTE/5G antenna
- 4x4 MIMO LTE & GPS / GLONASS
- Ultra-wideband, includes 450 MHz and 3.5 GHz CBRS bands
- Robust and water-resistant antenna (IP69K)
- Ideal for transportation and marine use
- Multi mounting options for easy installation

Product Overview

The MIMO-3-14 is a 5-in-1 high performance multi frequency antenna within a single housing, providing four cellular and a GPS/GLONASS antenna. The four cellular MIMO antennas (for 2G/3G/4G) covers the contemporary 617 MHz to 2700 MHz bands, as well as the new emerging LTE and 5G spectrum for 450MHz and 3.5GHz CBRS bands, which is becoming popular across the various international cellular network operators for LTE. The ultra-wideband performance of the antenna allows it to be used across different operators and technologies and is ready for future cellular technologies up to 3.8 GHz for 5G applications. The fifth antenna is a high-performance active GPS/GLONASS system operating down to -40°C.

The MIMO-3-14 exceeds the performance of most competitors due to the attention to the design of this high-performance antenna. The radiation patterns of all radiating elements provide an excellent balance between omnidirectionality, pattern diversity and good radiation abilities at the desired elevation. This is an important criterion for the transportation and marine market. which the antenna was specifically designed for. Main applications are for commercial/industrial vehicles, marine, M2M and other IoT systems using a wide range of radio technologies, while remaining futureproof over the wide frequency band.

Features

- Ultra-wideband from 410 to 470 MHz, 617 to 2700 MHz and 3400 to 3800 MHz bands
- Cleverly designed decorrelated antennas give superior MIMO performance in the cellular bands
- Includes high-performance GPS/GLONASS antenna
- Careful mechanical design provides ruggedness, corrosion, water and dust resistance (IP69K)
- Ground plane independent: MIMO-3 is designed with an internal ground plane, making the antenna suitable for implementation on all surface types


Application Areas

- Transport broadband, automation and telemetry for buses, utility, trucks and public safety vehicles
- Industrial factory automation, robotic machinery and other M2M systems telemetry
- Farming & agricultural automation such as M2M & IoT
- Broadband cellular distribution for marine / boats (inland and near coastal vessels)
- Mining vehicles and machinery communications, telemetry and automation (M2M & IoT)



Frequency Bands

The MIMO-3-14 is an Omni-directional antenna that works from | 410 - 470 MHz | 617 - 960 MHz | 1427 - 1517 MHz | 1710 - 2700 MHz | 3400 - 3800 MHz | and the following Wi-Fi frequency bands | 2400 - 2500 MHz |

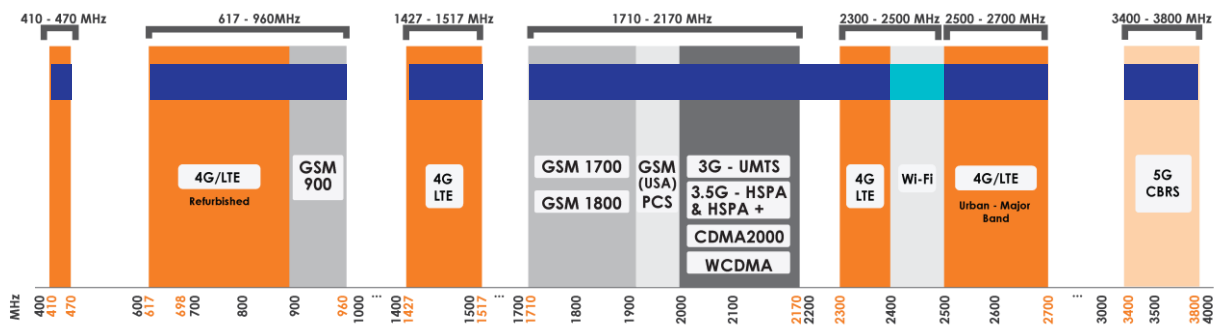

Indicates the LTE bands on which MIMO-3-14 works

Indicates the WI-FI bands on which MIMO-3-14 works

Antenna Overview

		
Ports	1 - 4	5
SISO / MIMO	4x4 MIMO	N/A
Frequency Bands	410 - 3800 MHz	1575.42 MHz / 1600 MHz
Peak Gain	6.2 dBi	21 dBi
Coax Cable Type	HDF 195	RTK-031
Coax Cable Length	2m	2m
Connector Type	SMA (M)	SMA (M)

*The coax cable & connector are factory mounted to the antenna

MIMO-3-14

©2022 Poynting Antennas (Pty) Ltd. All rights reserved
Product Specifications may change without prior notice
Revised: March 2022

Electrical Specifications - Cellular

Frequency Bands:	410 – 470 MHz 617 – 960 MHz 1427 – 1517 MHz 1710 – 2700 MHz 3400 – 3800 MHz
Gain (max):	1.5 dBi @ 410 – 470 MHz 2.2 dBi @ 617 – 960 MHz 4.2 dBi @ 1427 – 1517 MHz 6.2 dBi @ 1710 – 2700 MHz 4.8 dBi @ 3400 – 3800 MHz
VSWR:	≤2.5:1
Feed Power Handling:	10 W
Input Impedance:	50 Ohm (nominal)
Polarisation:	Linear Vertical
Coax Cable Loss:	0.250 dB/m @ 400 MHz 0.385 dB/m @ 900 MHz 0.507 dB/m @ 1500 MHz 0.565 dB/m @ 1800 MHz 0.666 dB/m @ 2400 MHz 0.788 dB/m @ 3000 MHz
DC short:	Yes

GPS/Glonass Antenna Electrical Specifications

Frequency Range (GPS):	1575.42MHz/1600MHz
Gain (Max):	21+/-2dBi
VSWR:	≤1.5:1
DC Voltage:	2.7-3.3 V
DC Current:	5-15mA
Noise Figure:	≤1.5 dB
Nominal Impedance:	50 Ω
Polarisation:	RHCP
Filter Out Band Attenuation:	12dB Min f0+50MHz, 16dBi Min f0-50MHz
Voltage:	2.7 – 3.3V
Max. Power:	50 W
Coax Cable Loss:	0.71 dB/m @ 1500 MHz

Product Box Contents

Antenna:	A-MIMO-0003-V2-14
Mounting Bracket:	Threaded spigots (up to 60mm clamping thickness), Adhesive surface mounting & Optional Magnetic mount

Ordering Information

Commercial Name:	MIMO-3-V2-14
Order Product Code:	A-MIMO-0003-V2-14
EAN Number:	6009710920596
EU Homologation Number:	E1*10R06/01*9550*00

Mechanical Specifications


Product Dimensions:	254 mm x 128 mm x 145 mm
Packaged Dimensions:	265 mm x 211 mm x 204 mm
Weight:	1.22 kg
Packaged Weight:	1.33 kg
Radome Material:	UV Stable ASA
Radome Colour:	Brilliant White Pantone P 179-1 C
Mounting Type:	Spigot, Surface and Magnetic mount options

Environmental Specifications, Certification & Approvals

Wind Survival:	≤220 km/h
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Outdoor/Indoor
Water Ingress Protection Ratio/Standard:	IP69K
Salt Spray:	MIL-STD 810G/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Enclosure Flammability Rating:	UL 94-HB
Impact Resistance:	IK 10
Product Safety & Environmental:	Complies with CE and RoHS standards

Antenna Performance Plots

VSWR: Cellular Antenna

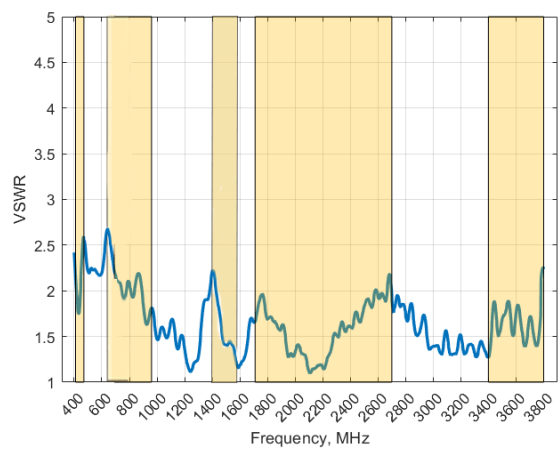


Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The MIMO-3-14 delivers superior performance across all bands with a VSWR of $\leq 2.5:1$.

*VSWR measured with a 2m low loss cable, 650 x 650 mm ground plane and unused ports terminated with 50Ω load.

GAIN (EXCLUDING CABLE LOSS): Cellular Antenna

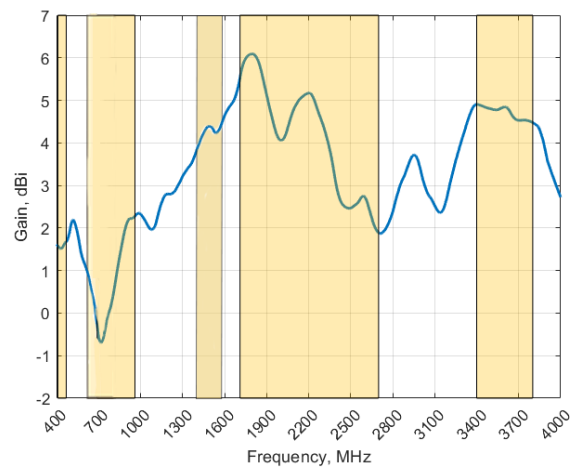


Gain* in dBi

6.2 dBi is the peak gain across all bands from 410 – 3800 MHz

Gain @ 410 - 470 MHz:	1.5 dBi
Gain @ 617 - 960 MHz:	2.2 dBi
Gain @ 1427 - 1517 MHz:	4.2 dBi
Gain @ 1710 - 2700 MHz:	6.2 dBi
Gain @ 3400 - 3800 MHz:	4.8 dBi


*Antenna gain measured with polarisation aligned standard antenna

Technical Drawings

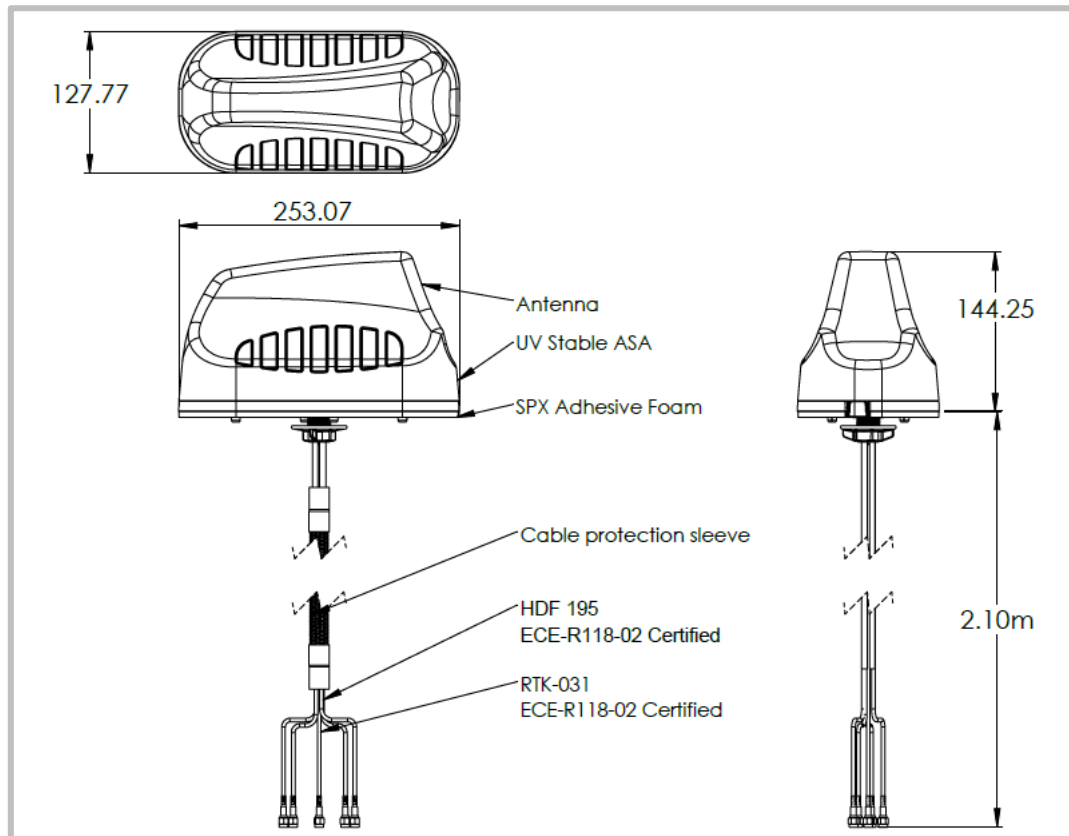


Radiation Patterns – Cellular


Azimuth (Top View): 410–470 MHz

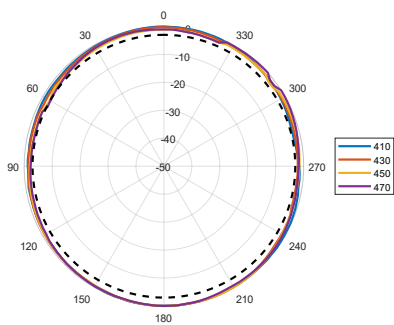


Azimuth (Top View): 698–960 MHz

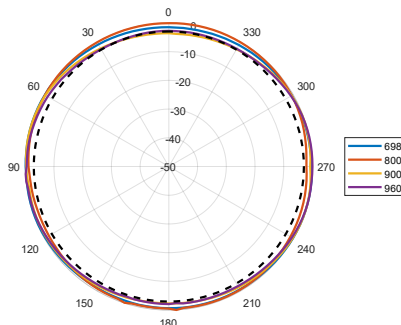


Azimuth (Top View): 1710–2100 MHz

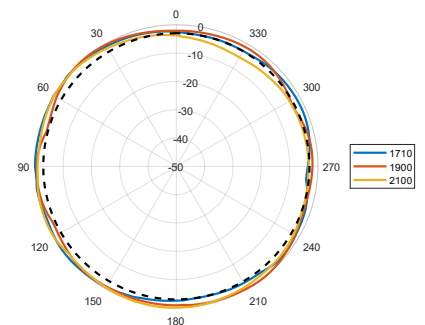


Azimuth (Top View): 2300–2700 MHz

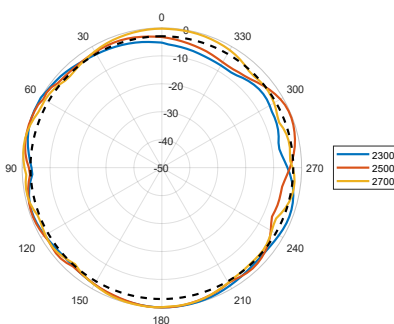


Azimuth (Top View): 3400–3800 MHz

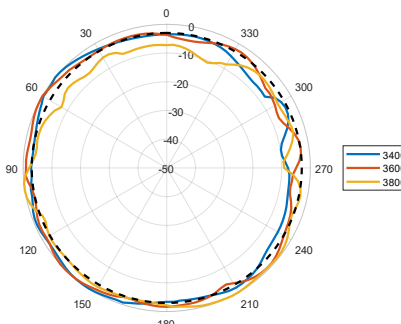


Elevation1 (Side View): 410–470 MHz

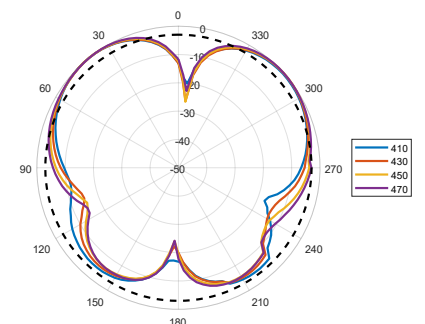


Elevation1 (Side View): 698–960 MHz

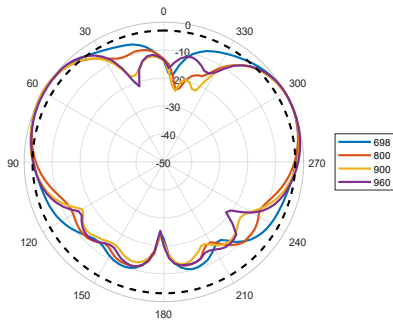


Elevation1 (Side View): 1710–2100 MHz

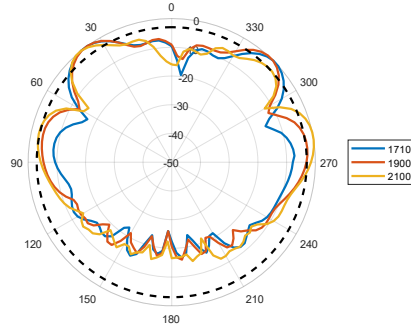


Elevation1 (Side View): 2300–2700 MHz

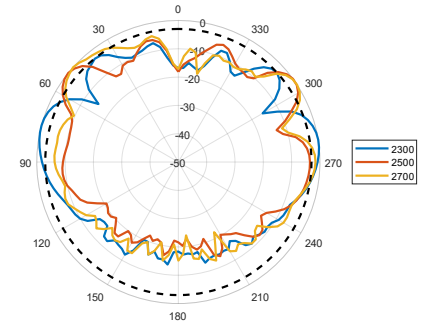


Elevation1 (Side View): 3400–3800 MHz

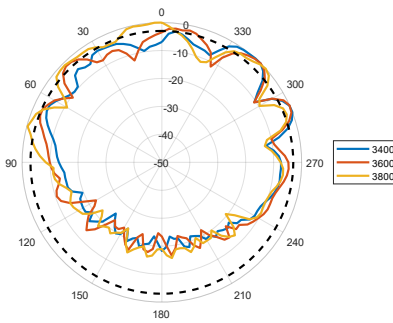


Elevation2 (Side View): 410–470 MHz

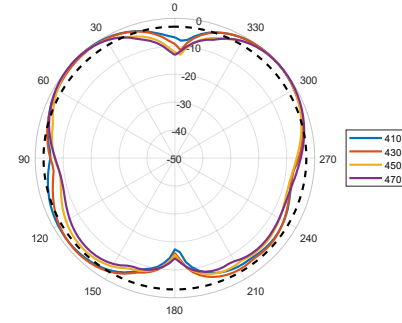


Elevation2 (Side View): 698–960 MHz

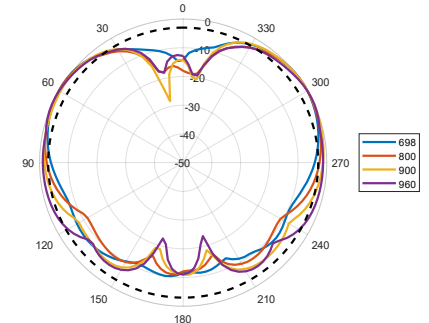


Elevation2 (Side View): 1710–2100 MHz

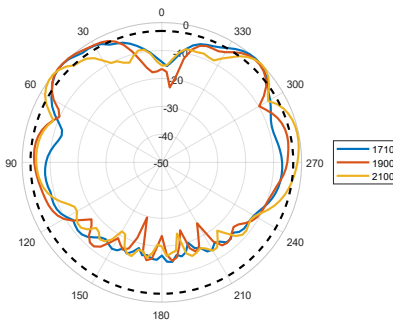

Elevation2 (Side View): 2300–2700 MHz

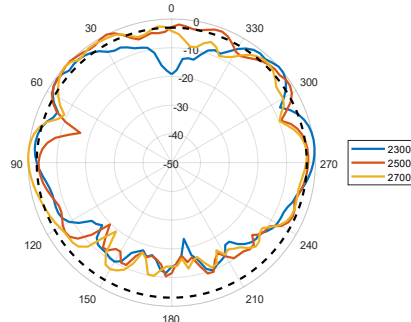


Elevation2 (Side View): 3400–3800 MHz

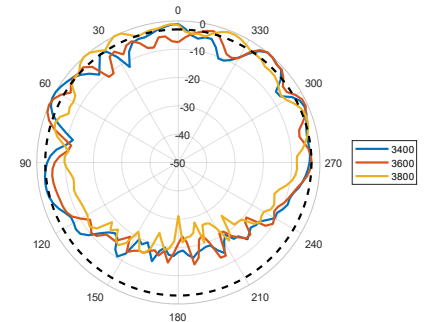


Radiation Patterns – GPS


XY Plane: 1561–1602 MHz

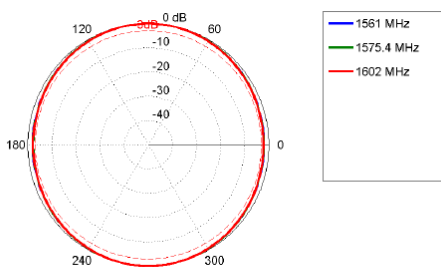


XZ Plane: 1561–1602 MHz

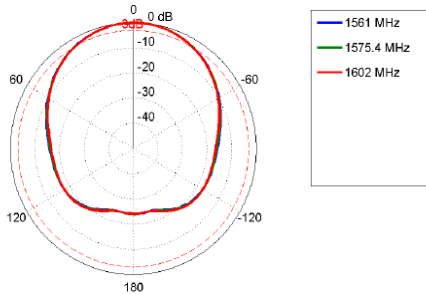

YZ Plane: 1561–1602 MHz

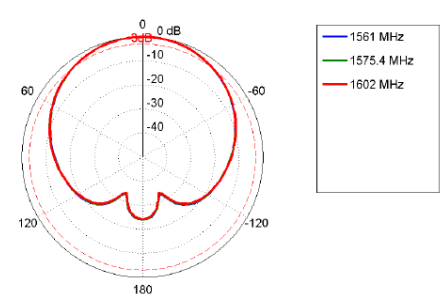


Mounting Options

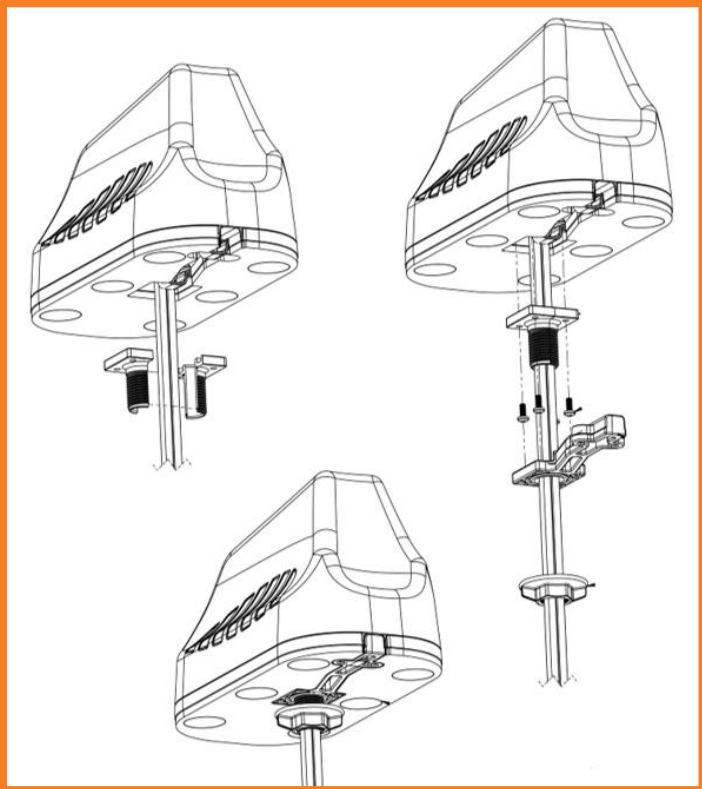


Standard Spigot Mount

Threaded Spigot Mounting

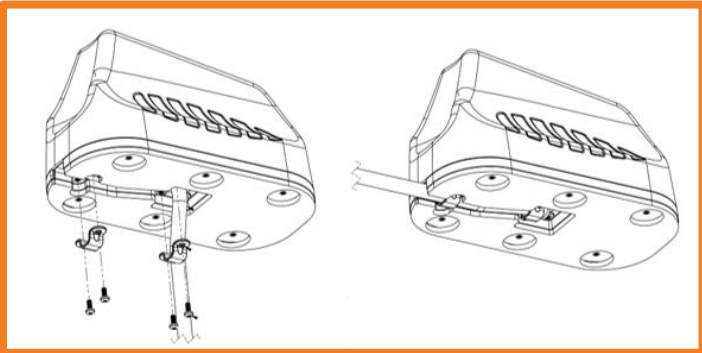

Surface Mount

Adhesive Surface Mounting

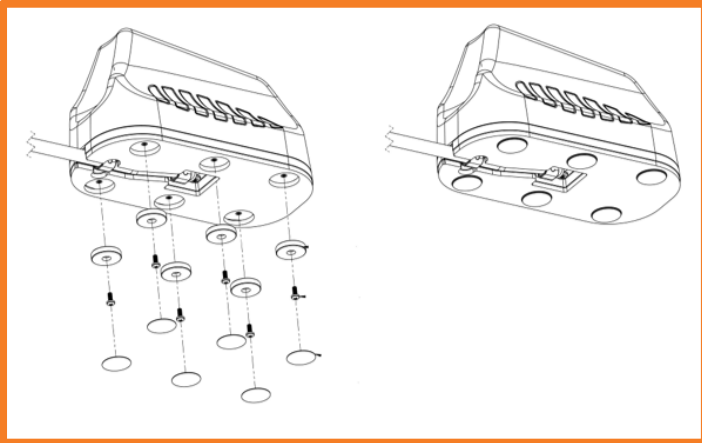

Magnetic Mount

Optional Magnetic Base Kit

Additional Accessories**A-MBK-0001-V1.0**

Magnetic Base Kit

**Various Cable Extensions Available**

CONTACT POYNTING**Poynting Antennas (Pty) Ltd - Head Office**

Unit 4, N1 Industrial Park,
Landmarks Avenue,
Samrand, 0157, South Africa

Phone: +27 (0) 12 657 0050**E-mail:** info@poynting.tech**International Email:** sales-global@poynting.tech**Poynting Europe**

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 7453 9002**E-mail:** sales-europe@poynting.tech**Poynting USA**

1804 Owen Court, Suite 104,
Mansfield,
TX 76063
USA

Phone: +1 817 533-8130**E-mail:** sales-us@poynting.tech