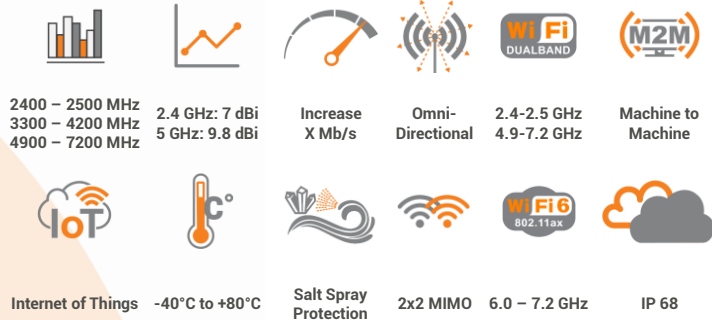
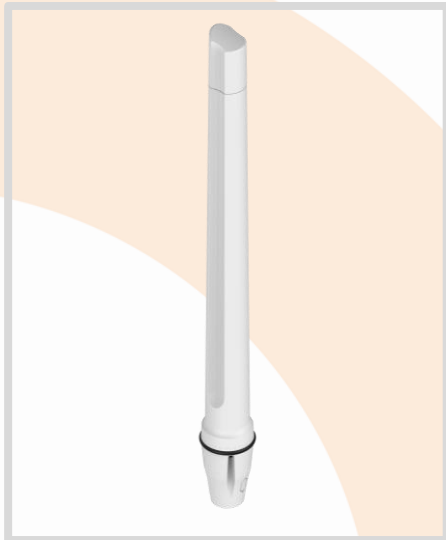


ANTENNAS | OMNI-498 SERIES

OMNI-DIRECTIONAL, MARINE, 2x2 MIMO WI-FI ANTENNA

Dual-Band Wi-Fi; 2400 – 2500 MHz, 3300 – 4200 MHz, 4900 – 7200 MHz; 9.8 dBi



- Dual-band Wi-Fi antenna for 2.4 GHz and 4.9 to 7.2 GHz
- 2x2 MIMO capability for improved performance
- Compliant with IEEE 802.11a/b/g/n/ac/ax wireless standards
- UV and saltwater protected for marine and coastal conditions
- Robust and all-weather proof for harsh conditions at sea (IP 68)
- Various 316-stainless steel mounting brackets available



Marine



Urban



Rural/Farm



Industrial

APPLICATION AREAS

Product Overview

The OMNI-498 is a dual-band Wi-Fi omni-directional antenna for marine & coastal deployments. The antenna provides dual-band Wi-Fi coverage in the 2.4 GHz and 4.9 to 7.2 GHz bands, making it ideal for any Wi-Fi access point, whether it is older Wi-Fi technology or new technology that goes up to Wi-Fi 6E (7.2 GHz). The antenna offers 2x2 MIMO capability from its vertically separated radiating elements, allowing for true omni-directional coverage suitable for marine and coastal applications.

The OMNI-498 is purpose-built for harsh environments with an IP 68 protection rating against dust and water ingress, with the antenna being foam filled, making it ideal for the most severe storms at sea. The radome is fully saltwater protected, so it can be used in highly corrosive environments, thanks to the UV stable ASA radome material.

Features

- Dual-band Wi-Fi antenna for 2.4 GHz & 4.9 to 7.2 GHz
- 2x2 MIMO capability for improved performance
- High gain omni-directional antenna for Wi-Fi deployments
- Robust and weather-resistant enclosure with an IP 68 rating
- UV and saltwater-protected enclosure for marine applications


Application Areas

- Marine applications: Yachts / Boats / Ferries
- Increase system transmission reliability
- High-end industrial-grade router applications
- Ports and harbour Wi-Fi & WLAN deployments
- Industrial and commercial Wi-Fi deployment



Frequency Bands

The OMNI-498 is an omni-directional antenna that works from | 2400 – 2500 MHz | 3300 – 4200 MHz | and | 4900 – 7200 MHz |

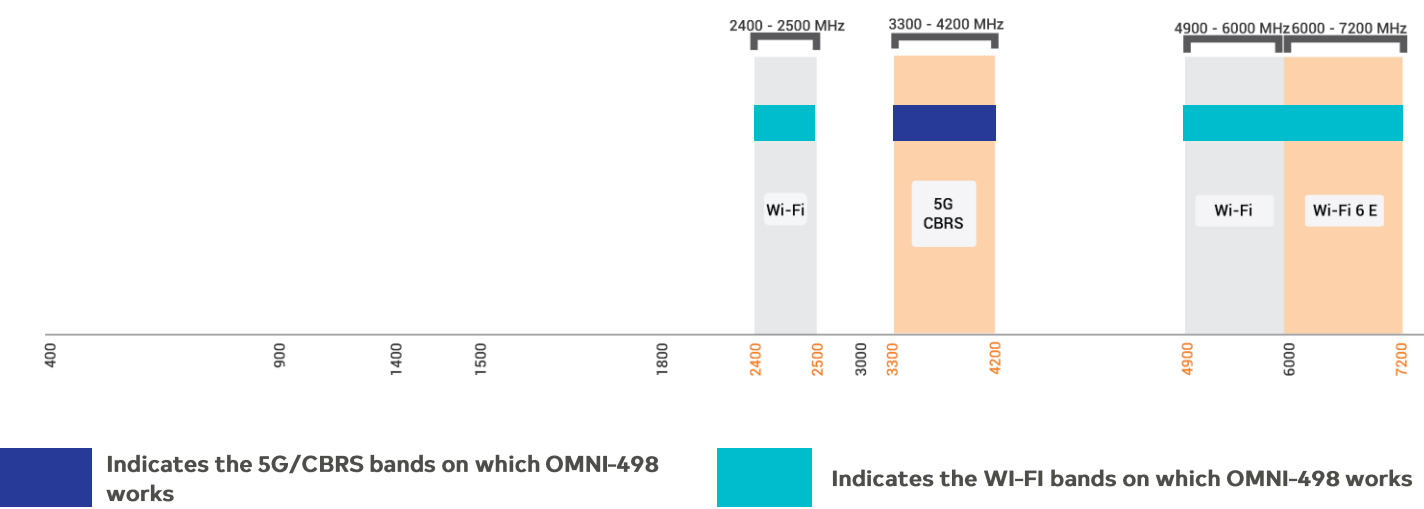

Antenna Overview

	
Ports	2
SISO / MIMO	MIMO
Polarisation	Linear Vertical
Peak Gain	9.8 dBi
Coax Cable Type	2 x Twin HDF 195
Coax Cable Length	2 m
Connector Type	SMA (M)

*The coax cable & connector is factory mounted to the antenna

Electrical Specifications

Frequency Bands:	2400 – 2500 MHz
	3300 – 4200 MHz
	4900 – 7200 MHz
Gain (Max):	7 dBi @ 2400 – 2500 MHz
	8 dBi @ 3300 – 4200 MHz
	9.8 dBi @ 4900 – 7200 MHz
VSWR:	<2:1
Feed Power Handling:	10 W
Input Impedance:	50 Ohm (nominal)
Polarisation:	Linear Vertical
Coax Cable Loss:	0.666 dB/m @ 2400 MHz
	0.788 dB/m @ 3000 MHz
	1.15 dB/m @ 5800 MHz
DC Short:	Yes

Product Box Contents

Antenna:	A-OMNI-0498-V1-01
Mounting Bracket:	1" (14 TPI) Marine Adapter (BRKT-40) & L-bracket (Ø30-50mm Pole)

Ordering Information

Commercial Name:	OMNI-498
Order Product Code:	A-OMNI-0498-V1-01
EAN Number:	6009710927458

Mechanical Specifications

Product Dimensions	750 mm x Ø75 mm (Incl. BRKT-40)
Packaged Dimensions:	705 mm x 150 mm x 100 mm
Weight:	0.68 Kg
Packaged Weight:	1.74 Kg
Radome Material:	UV Stable Marine ASA
Radome Colour:	Brilliant White Pantone P 179-1C
Mounting Type:	Standard 1" -14 TPI marine mount & Wall/pole mount


Environmental Specifications, Certification & Approvals

Wind Survival:	≤160 km/h
Temperature Range (Operating):	-40°C to +80°C
Environmental Conditions:	Outdoor/Indoor
Water Ingress Protection Ratio/Standard:	IP 68
Salt Spray:	MIL-STD 810G/ASTM B117
Operating Relative Humidity:	Up to 98%
Storage Humidity:	5% to 95% - non-condensing
Storage Temperature:	-40°C to +80°C
Enclosure Flammability Rating:	UL 94-HB
Impact Resistance:	IK 08
Product Safety & Environmental:	Complies with CE and RoHS standards



Antenna Performance Plots

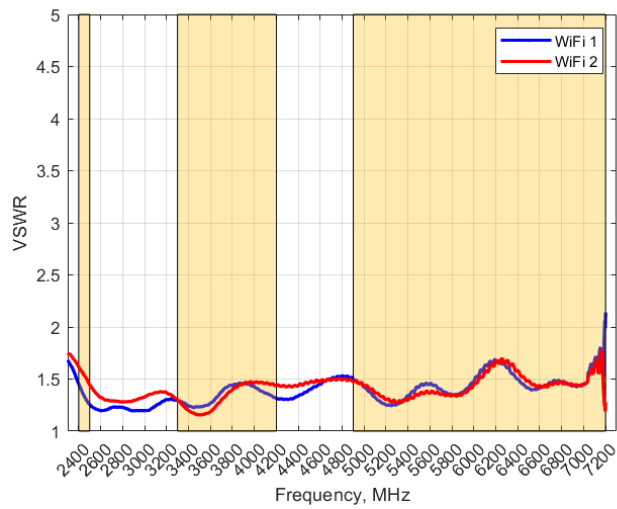VSWR




Voltage Standing Wave Ratio (VSWR)*

VSWR is a measure of how efficiently radio-frequency power is transmitted from a power source, through a transmission line, into a load. In an ideal system, 100% of the energy is transmitted which corresponds to a VSWR of 1:1.

The OMNI-498 delivers superior performance across all bands with a VSWR of <2:1.

*VSWR measured with 2m low loss cable.

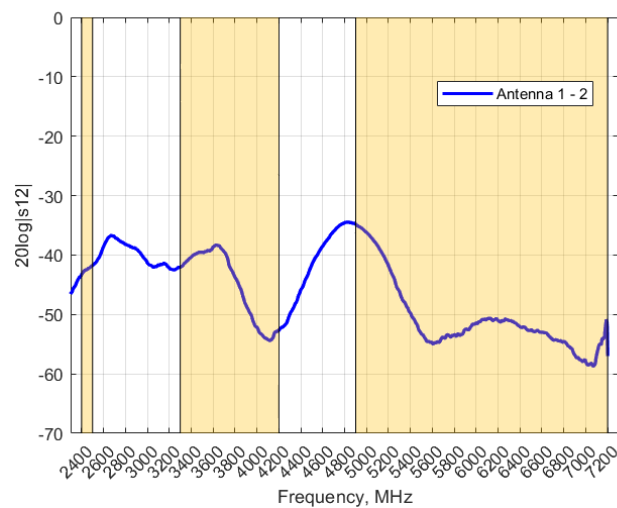
Isolation



Isolation

Isolation is a measurement of the amount of energy leaked from one port to another. A good isolation is under -20 dB.

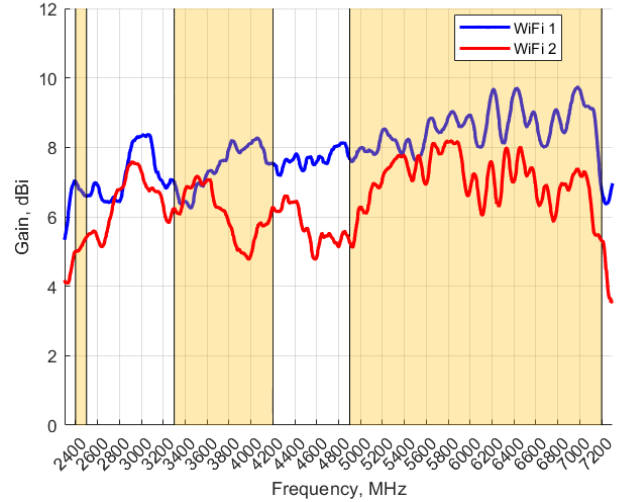GAIN (EXCLUDING CABLE LOSS)











Gain* in dBi

9.8 dBi is the peak gain across all bands



Gain @ 2400 – 2500 MHz:	7 dBi
Gain @ 3300 – 4200 MHz:	8 dBi
Gain @ 4900 – 7200 MHz:	9.8 dBi

*Antenna gain measured with polarisation aligned standard antenna

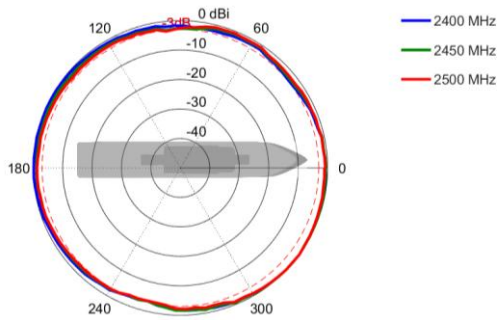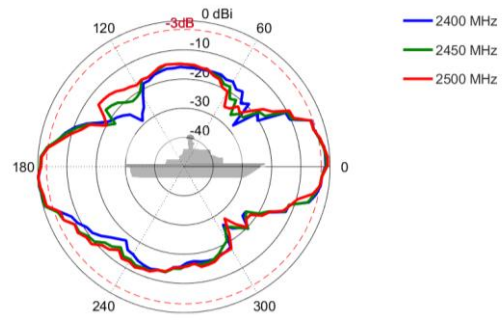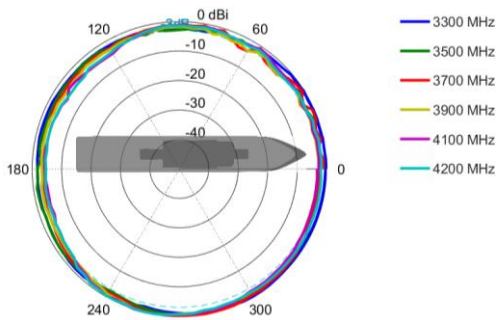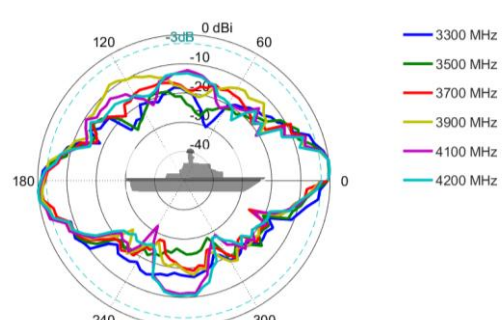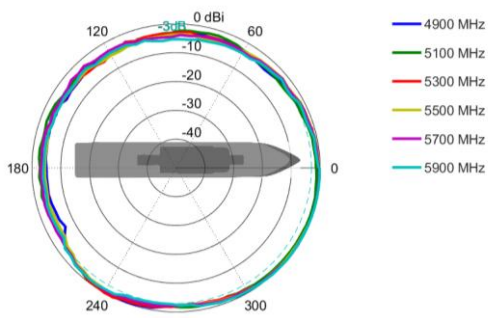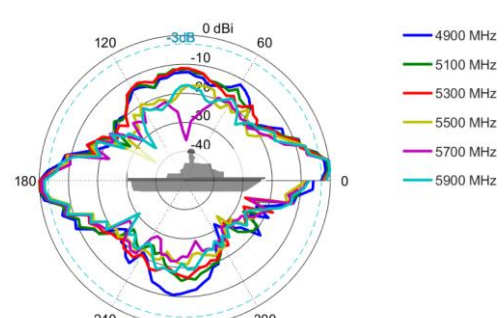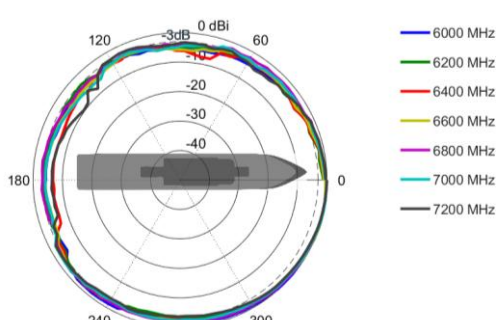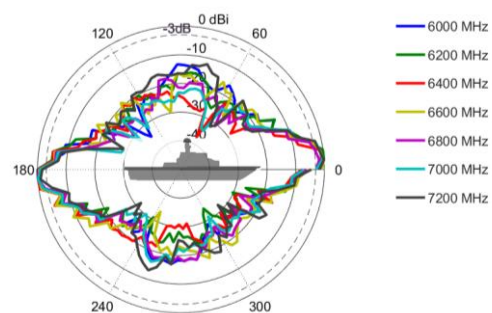
MIMO Radiation Patterns

Azimuth: 2400 – 2500 MHz

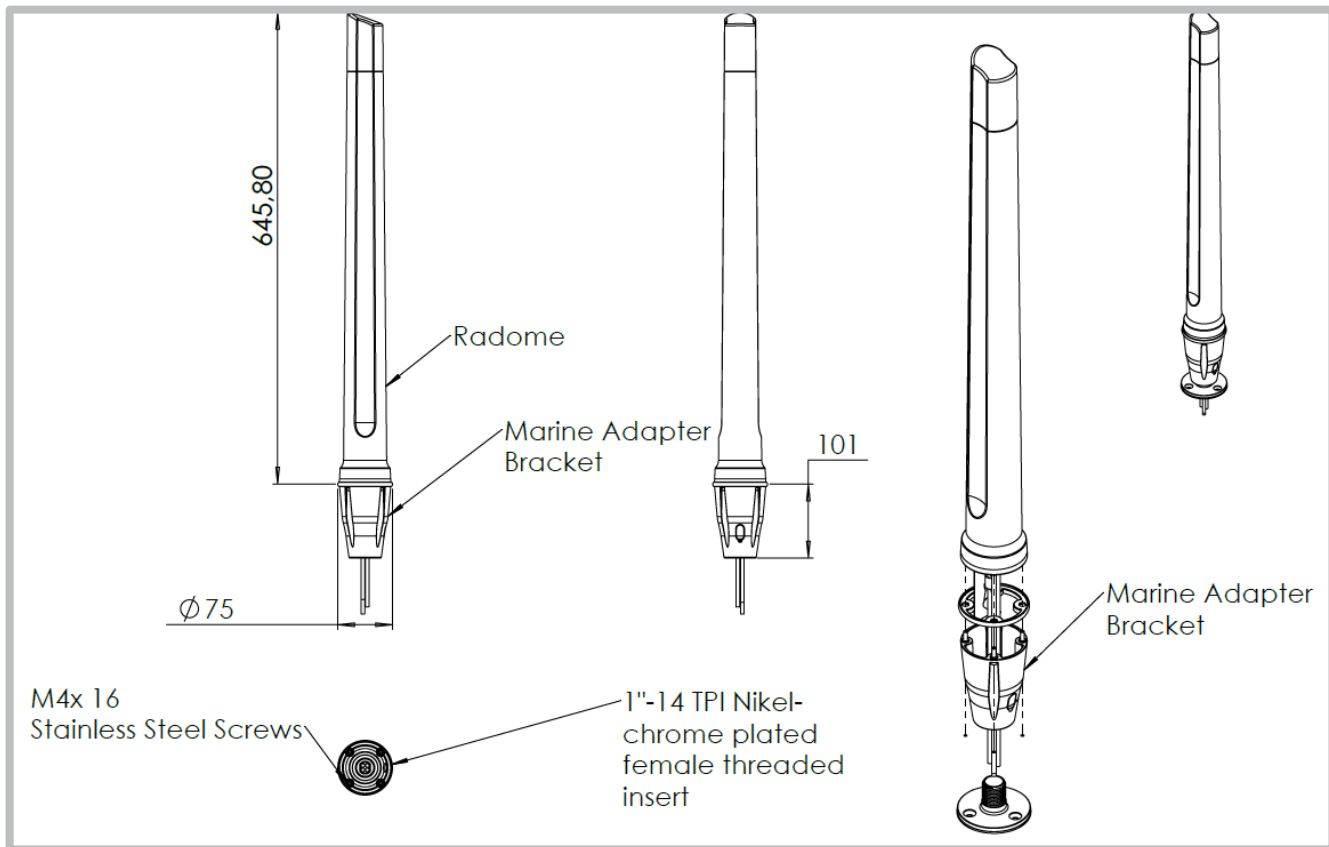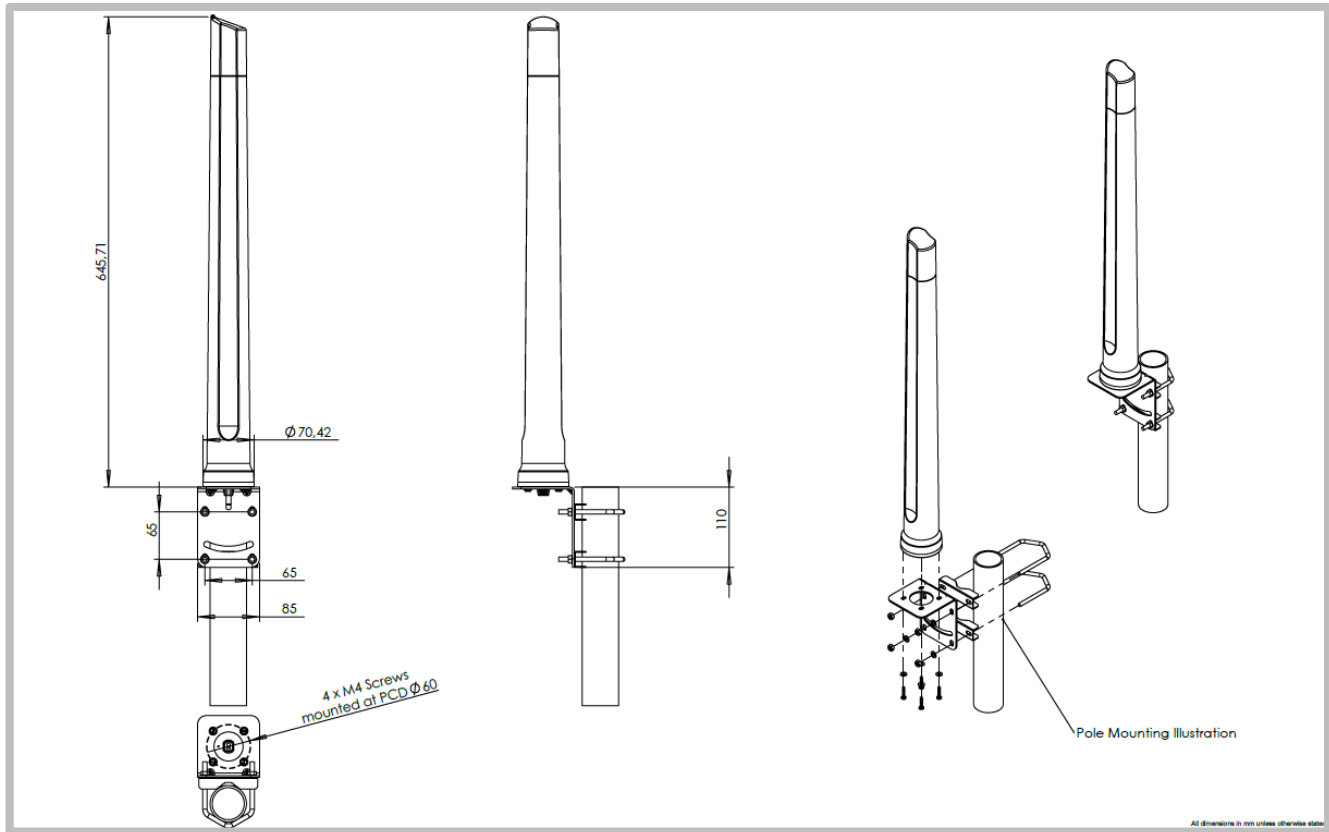Elevation: 2400 – 2500 MHz

Azimuth: 3300 – 4200 MHz

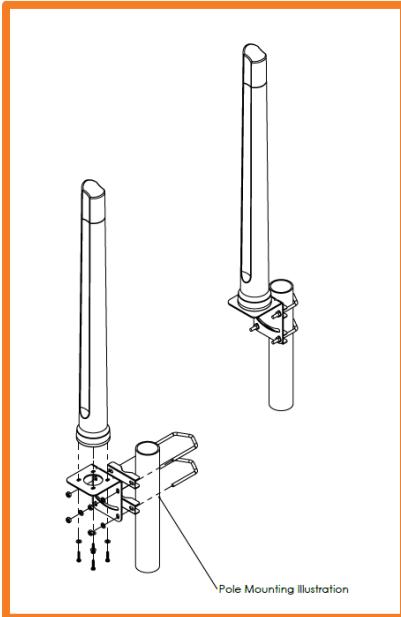Elevation: 3300 – 4200 MHz

Azimuth: 4900 – 5900 MHz

Elevation: 4900 – 5900 MHz

Azimuth: 6000 – 7200 MHz

Elevation: 6000 – 7200 MHz


Technical Drawings

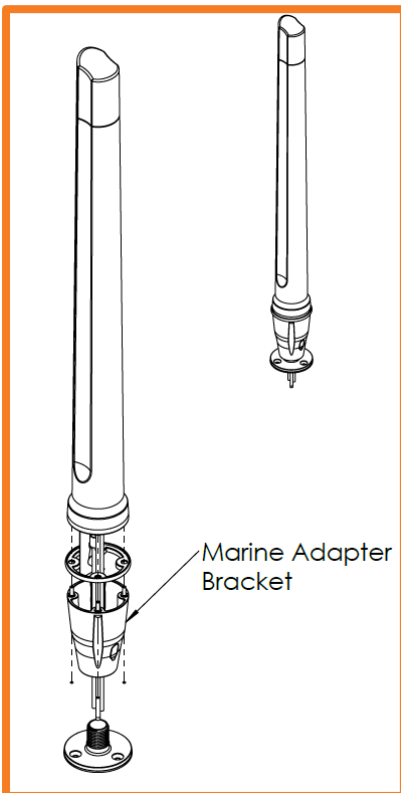


Mounting Options



Pole Mount

L-Bracket 316 Stainless Steel – included
 (For Ø 30-50mm pole)



Marine Bracket Mount

1" -14 TPI female adapter – included

Mounts to standard marine brackets:

- BRKT-37: Flat Mount - Optional
- BRKT-38: Ratchet Mount - Optional
- BRKT-39: Rail Mount - Optional

See Optional Accessories below

Also available: BRKT-41 with 1.25" – 11TPI female adapter (Optional)
 See Accessories below

Additional Accessories

**BRKT-37**

Marine flat mount antenna bracket 1"-14TPI 316 Stainless Steel

**BRKT-38**

Marine ratchet rail mount antenna bracket 1"-14TPI 316 Stainless Steel

**BRKT-39**

Heavy duty marine mount antenna bracket 1"-14TPI 316 Stainless Steel

See accessories technical specifications on www.poynting.tech

CONTACT POYNTING

Poynting Antennas (Pty) Ltd - Head Office

Unit 4, N1 Industrial Park,
Landmarks Avenue,
Samrand, 0157, South Africa

Phone: +27 (0) 12 657 0050

E-mail: info@poynting.tech

International Email: sales-global@poynting.tech

Poynting Europe

Regus Business Center Neue Messe Riem
Kronstadter Straße 4
81677 München
Germany

Phone: +49 89 7453 9002

E-mail: sales-europe@poynting.tech

Poynting USA

1804 Owen Court, Suite 104,
Mansfield,
TX 76063
USA

Phone: +1 817 533-8130

E-mail: sales-us@poynting.tech